




priomold
KUNSTSTOFFSPRITZGUSS

construction guidelines sls

december 2022

selective laser sintering (sls)

- SLS is a 3D-printing process, where plastic powder is locally melted, layer by layer with a laser, to form the finished component
- Complex geometries, for example with undercuts, can be easily produced by using the SLS technology

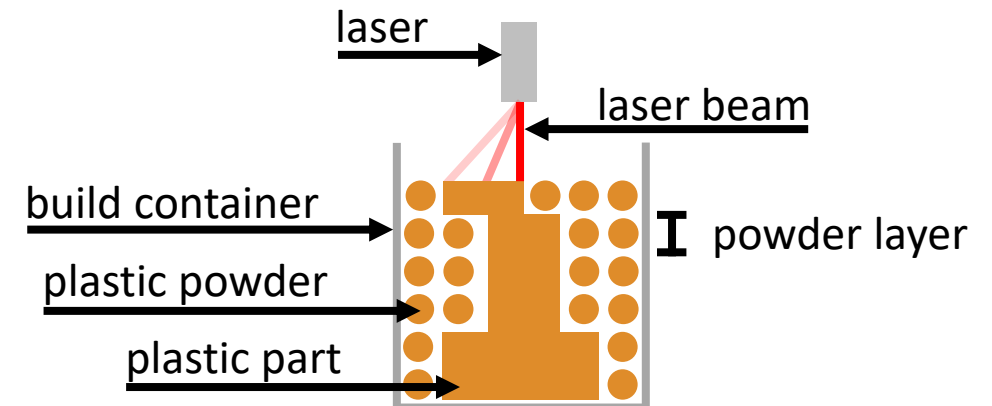

maximum component dimensions




priomold
KUNSTSTOFFSPRITZGUSS

- **Maximum possible component dimensions:**

$$X \times Y \times Z = 700 \times 380 \times 580 \text{ mm}$$

- **Drill holes and cylindrical geometries such as pins should be produced in the Z-direction if possible**

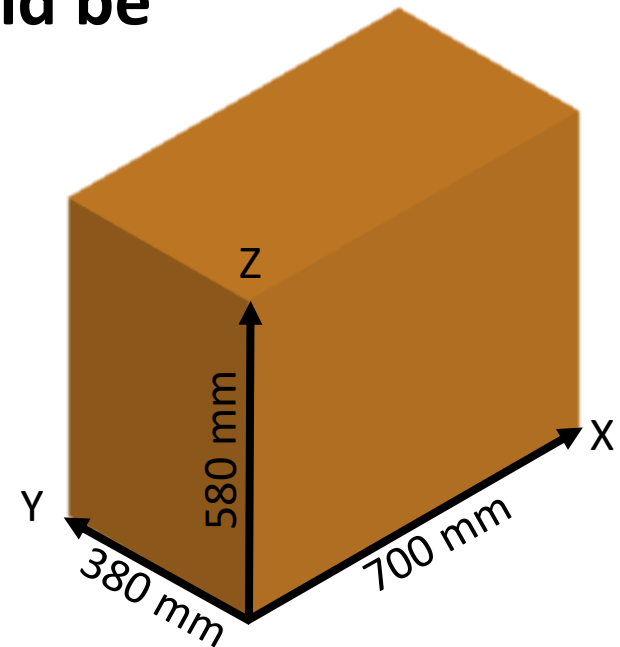

material variety




Material	Composition	Colour	Features
PA 2200	PA 12	white	Multipurpose material, Balanced material properties, Good strength, Good stiffness, Good chemical resistance, Suitable for food contact
PA 2201	PA 12	translucent	Multipurpose material, Balanced material properties, Good strength, Good stiffness, Good chemical resistance,
PA 3200 GF	PA 12 filled with glass balls	white	High stiffness, Good elongation at break, High wear resistance, Improved temperature property profile compared to PA 2200
Alumide	PA 12 filled with aluminium	metallic grey	High stiffness, Very high temperature resistance, Dimensional stability at high temperatures, Improved temperature property profile compared to PA 2200, Easy to rework (good machinability and grindability)
PA 2241 FR	PA 12 with flame retardant	white	With halogencontaining flame retardant, Good tensile strength, Good stretchability, Refresh optimised material, Suitable for use in the aviation industry
PA 2210 FR	PA 12 with flame retardant	white	With halogenfree chemical flame retardant, Fire protection class UL 94 / V-0 fulfilled from 3 mm wall thickness onwards, Suitable for use in the aerospace industry and in the electrical and electronics industry
PA 1101	PA 11	white	Multipurpose material, Balanced material properties, High ductility, High impact strength, High breaking strength, Shatterproof in case of breakage, More temperature resistant than PA 12, Based on renewable raw materials
TPU 1301	TPU	white	High resilience after deformation, Good hydrolysis resistance, High UV stability

Your material is not listed? Contact us!

layer thickness

- We always manufacture with the ideal layer thickness for your component and material
- Generally we manufacture with layer thicknesses of 100 μm , 120 μm or 150 μm

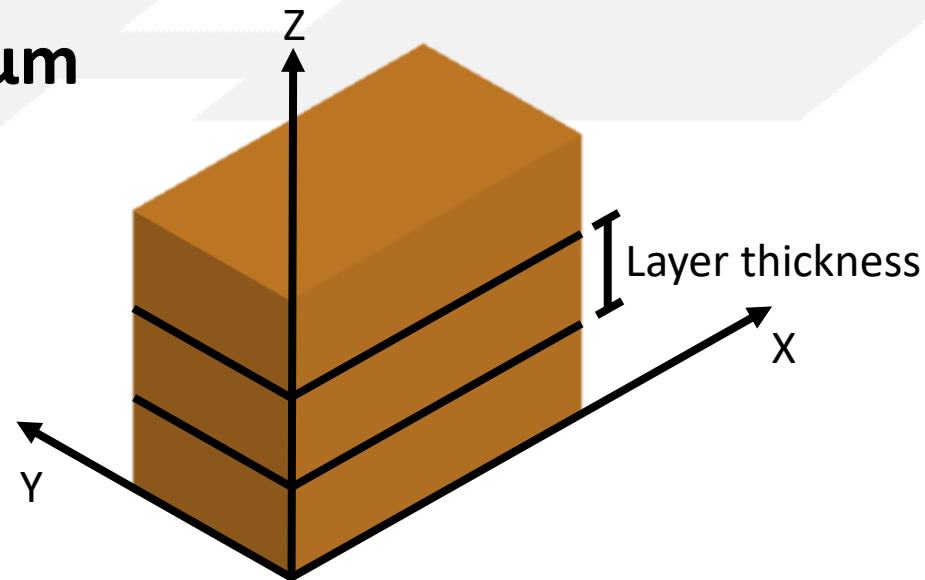

wall thickness / pin diameter



priomold
KUNSTSTOFFSPRITZGUSS

- **The minimum wall thickness (X-, Y- and Z-direction) is approximately 0.8 mm**
- **The minimum diameter of a cylindrical pin is approximately 0.8 mm**
- **For repeatable measurements and mechanical properties, the minimum wall thickness is approximately 1.5 mm and the minimum pin diameter is approximately 1.8 mm**

drill holes

- For each wall thickness, there is a minimum diameter for a drill hole that can be produced directly in the SLS process
- The following table can be used as an orientation:


Wall thickness	Minimum diameter
0.5 to 0.6 mm	0.8 mm
0.6 to 1.0 mm	0.9 mm
1.0 to 1.8 mm	1.1 mm
1.8 to 2.4 mm	1.2 mm
2.4 to 4.0 mm	1.5 mm
4.0 to 6.0 mm	1.8 mm

visibility of the single layers



priomold
KUNSTSTOFFSPRITZGUSS

- If the surface of a component is inclined by 20° or less in relation to the XY-plane, the single layers on the surface of the component are **visible**

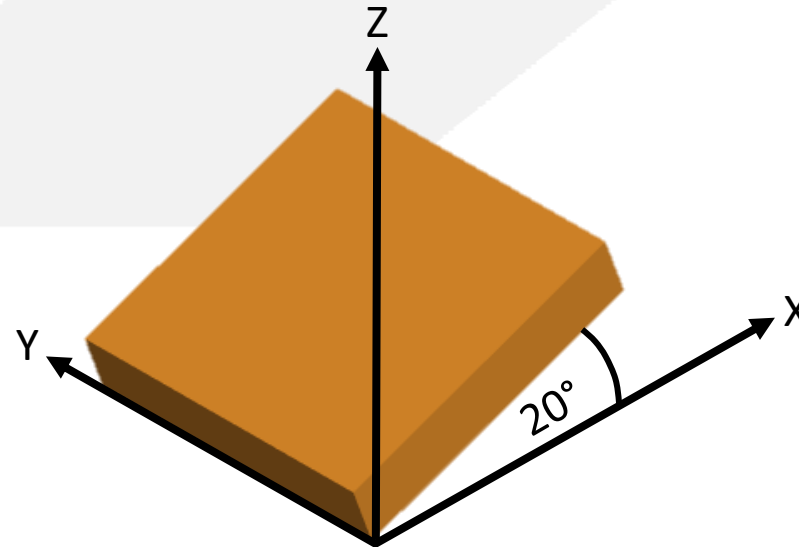


corners and edges




priomold
KUNSTSTOFFSPRITZGUSS

- **Sharp corners and edges are not manufacturable**
- **If possible, use a minimum radius of 0.3 mm at corners and edges**

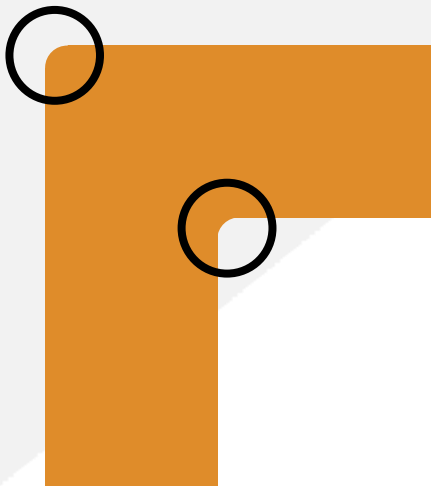

- Internal and external threads can be produced from a size of M10 if they are manufactured in Z-direction
- For smaller threads, thread inserts should be pressed in

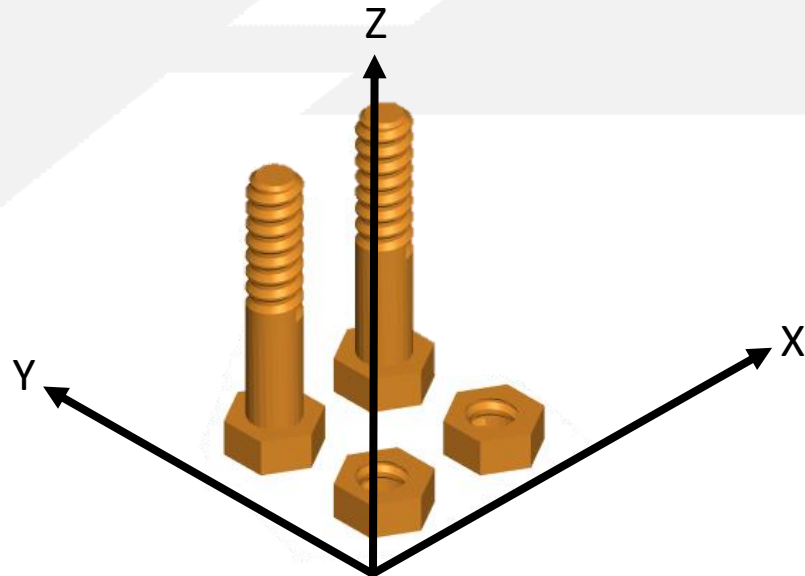


loose connection / press fit




priomold
KUNSTSTOFFSPRITZGUSS

- A gap of 0.1 mm between a male and female component creates a loose connection
- No gap between a male and female component creates a press fit
- This only applies to components that are assembled after the manufacturing process (otherwise see joints)

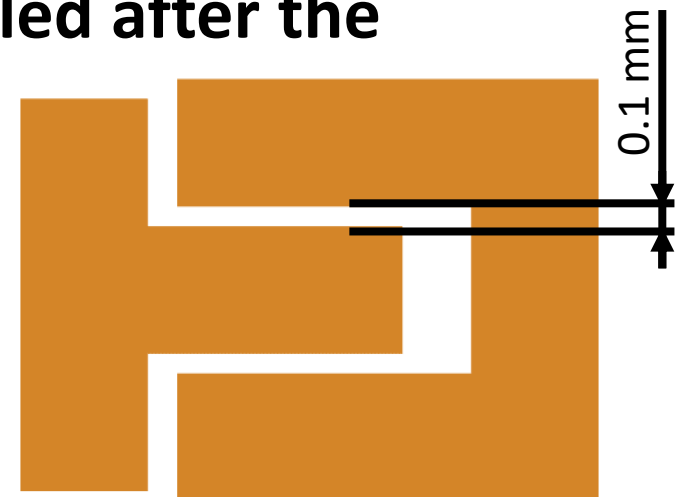




- **The gap size for joints that are manufactured in the X-, Y- or Z-direction should be 0.4 mm**

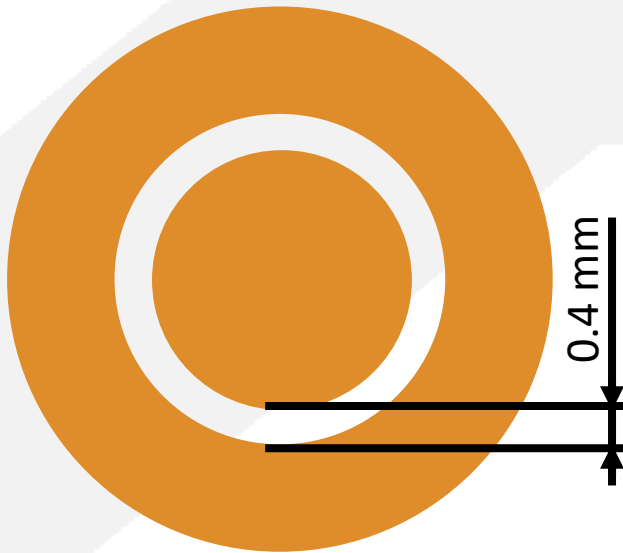

integral hinges

- Possible for the materials PA 2200, PA 2201 and PA 1101
- Integral hinges should be designed open and attached to thick walls if possible
- The following guide values can be used for the design integral hinges with a radius r of 0.5 mm:

Opening angle	Length	Wall thickness
180°	1.60 mm	0.30 to 0.45 mm
90°	0.72 mm	0.30 to 0.45 mm

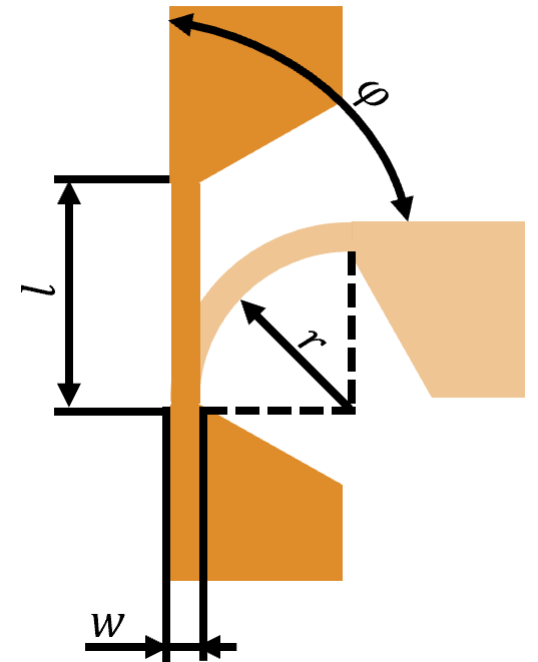

font size

- The minimum font size that can be manufactured (negative and positive) in all directions (X, Y and Z) is approximately 10
- A font size of 10 corresponds approximately to a font height of 3.5 mm
- The inscription should be recessed or raised at least 1 mm
- If possible, use fonts without serifs, such as Arial or Calibri



- SLS manufactured components can only fulfil tolerances with symmetrical deviations (for example 20 ± 0.2 mm)
- Tolerances depend on geometry and material
- Guide values for the expected tolerances are:


Nominal dimension	Upper or lower deviation
0 to 30 mm	± 0.2 mm
30 to 100 mm	± 0.3 mm
greater 100 mm	± 0.3 % of the nominal dimension

powder removal



- **Residual powder must be removable from the component**
- **The component must not enclose any powder (no internal chambers)**
- **Thin and long inner tubes, as well as complex inner structures complicate the removal of residual powder**
- **All components are media blasted and blown off with compressed air to remove the residual powder**

- **Components with large surfaces in combination with thin wall thicknesses are process-related and at risk of warpage**
- **Reinforcement of large surfaces, for example with ribs, can significantly minimise warpage-effects**

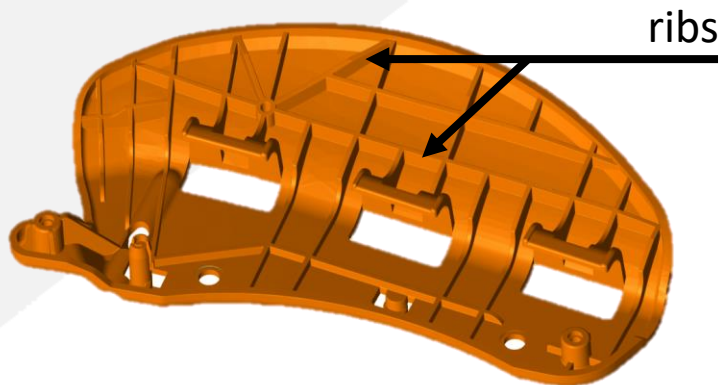


price-optimised design



priomold
KUNSTSTOFFSPRITZGUSS

- **If possible, use geometries which can be nested inside each other in order to save space in the build container and save manufacturing costs**

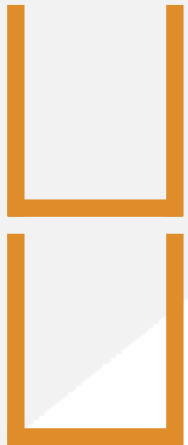

not price-optimised



price-optimised



post-processing



Procedure	Explanation
Media blasting	Blasting of the component surface with glass beads to completely remove the residual powder from the surface and to slightly smooth the surface. This finishing process is used on every component.
Chemical smoothing	Chemical smoothing raises the surface quality of SLS parts up to injection moulding level. The pores on the surface of chemically smoothed SLS 3D-printed components are completely closed after applying this process, so that these parts are 100 % waterproof, even under pressure.
Vibratory finishing or barrel finishing	Mechanical smoothing of the surface of SLS components by a slight removal of material from the surface by using vibrating grindstones.
colouring	Colouring of SLS components without changing the geometry or the dimensions of the components. Colouring is possible in all standard colours such as yellow, orange, red, blue, green, brown, grey and black.
Water- or gastight infiltration	Infiltration of the slightly porous surface of SLS components with a 1-component high-performance polymer. Components finished in this way are waterproof and gastight and approved for contact with drinking water and foodstuffs.
Mecanical finishing	For example, cutting threads, pressing in thread inserts or reaming drill holes.
Pad printing	Printing logos or inscriptions on the surface of SLS parts. For this finishing process, the surface of the component should be chemically smoothed before.
Painting	Painting the surface of laser sintered components.

Your desired post-processing is not listed? Contact us!

- **Creation of initial sample inspection reports, measurement protocols or false colour target/actual comparisons for your 3D-printed parts**
- **False colour target/actual comparisons are created with a GOM ATOS Capsule 3D scanner, by placing the additively manufactured component over the digital twin and indicat the deviations in colour**

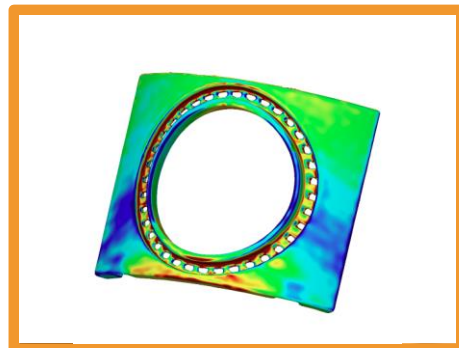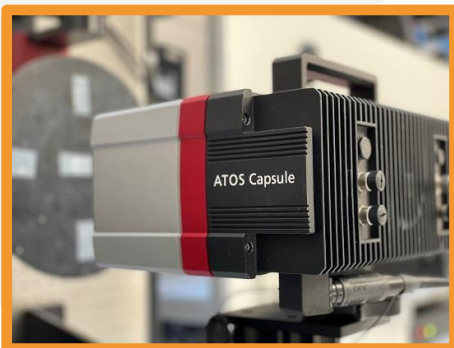

quotations

- **The quotation is free of charge and without obligation**
- **To prepare a quotation, we need the following data and informations mailed to info@priomold.de:**
 - **CAD data (ideally as .stl, .stp or .step)**
 - **Number of pieces**
 - **Desired material**
 - **Desired post-processing or quality assurance**

contact



Felix Parsch
Head of Additive Manufacturing
f.parsch@priomold.de
+49 7084 976969 51

Inquires to:

info@priomold.de

More information on request or at:

www.priomold.com/services/3d-printing

phone: + 49 (0) 7084 9769690
fax: + 49 (0) 7084 9769699
e-mail: info@priomold.de
web: www.priomold.com

priomold gmbh
gewerbestr. 6
75328 schöenberg
germany

